




Deckenleuchten | 220-240 V | topLED 96 W 1800 mA | DALI | CRI 90
7789



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	downward and upward
Lampenleistung	96 W
Lichtstrom (Lichtquelle)	13388 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tonalität	3000 K
Farbwiedergabeindex	90 Ra
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Leuchte dimmbar	DALI
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	10.2 Kg

Oberfläche Diffusor	
Material	PE
Farbe	neutral

Oberfläche Fassung	
Material	Eisen
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Lackierung

Deckenleuchten | 220-240 V | topLED 96 W 1800 mA | DALI | CRI 90
7789

Double emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 108 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 13388 lm, with a 139.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of pe; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 10.2 kg. The power supply driver is included in the delivery.


The total absorbed power is 96 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	81 %
Lichtstrom (Lichtquelle)	13388 lm
Leuchten Lichtstrom	10894 lm
Consumption	96 W
Leuchten Lichtausbeute	113 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 22

OPTICAL	
Light distribution simmetry	Symmetrical
Optica C0/C180	115°

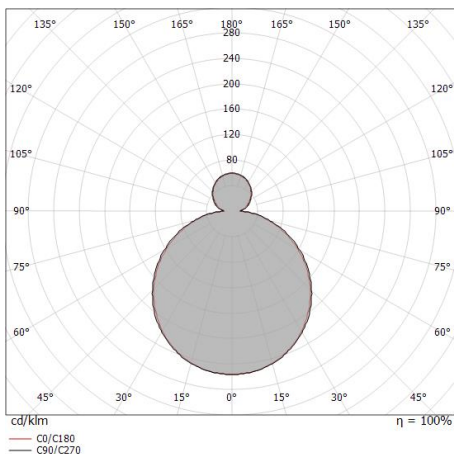


Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C90) [lx]	E(C0) [lx]
0.5	1.64 1.58	11164	791	852
1.0	3.28 3.16	2791	198	213
1.5	4.91 4.75	1240	88	95
2.0	6.55 6.33	698	49	53
2.5	8.19 7.91	447	32	34
3.0	9.83 9.49	310	22	24

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 115.4°)
— C90/C270 (Half-peak divergence: 117.2°)



Mr.Magoo_S | Ceiling Lights | Accessories
7789



Dimmer
Bluetooth, 220-240V

Code
KIT0079